

Shear-Seal® Directional Control Valve

Series 9000, 9020

Features

- ▶ Original Shear-Seal® technology
- ▶ Interflow/non interflow
- ▶ Easy panel mounting
- ▶ Tolerates contaminants
- ▶ Spring return option

Applications

- ▶ Pilot valve for pneumatic valve actuators
- ▶ Gas manifold controls
- ▶ Manual control of 2-position cylinder

* Please visit Bertrem Valve's Website to see more valves that address industry needs with uncompromising quality




Shown with option "D" red ball type handle

General Specifications*

Working Pressure:	Pneumatic or hydraulic from 150 psi to 350 psi (10.3 to 24.1 bar); see table	Media Temperature Range:	-40° to +250°F (-40° to +121°C)
Cv, Minimum Orifice:	See table	Wetted Material:	
Back Pressure:	Must not exceed 250 psi (17.2 bar) at return port for satisfactory operation	Body:	Anodized aluminum
Proof Pressure:	1-1/2 times working pressure except at return port (without damage to valve)	Standard O-Rings:	Buna N
Burst Pressure:	2-1/2 times working pressure except at return port (300 psi, 20.7 bar)	Pressure Seals:	Brass
		Rotor:	Hard anodized aluminum
		Handle Rotation:	90°; 45° each side of center
		Detent:	3-position detent (except -MC, -MR options)

* See product configurator for additional options.

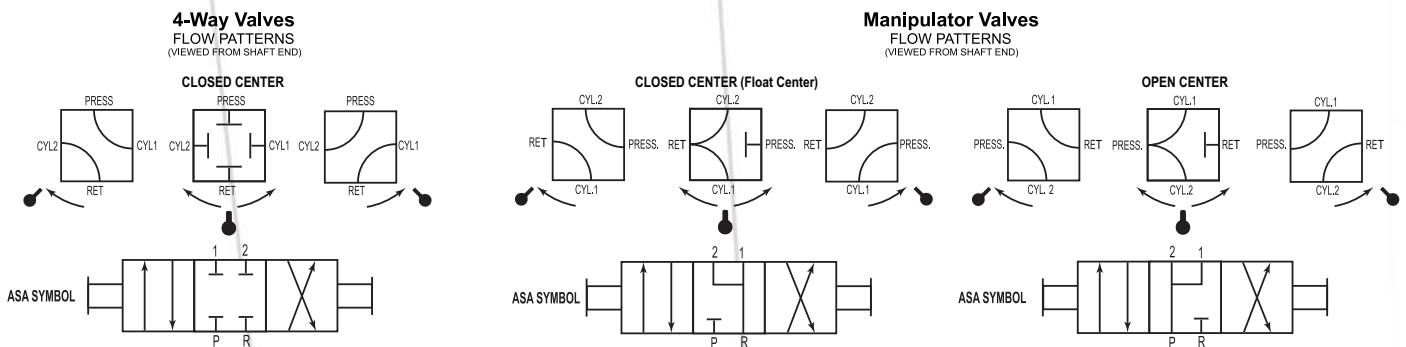


	Port Size NPT	Min. Flow Passage Dia.	Cv Factor	Air and Oil Rated Pressure psi (bar)	Manipulator Rated Pressure psi (bar)	Approx. Shipping Weight lbs. (kg)
9000 Series Non Interflow	1/4"	3/16"	0.52	150 (10.3)	150 (10.3)	2 (0.9)
	3/8"	3/16"	0.52	150 (10.3)	150 (10.3)	2 (0.9)
9020 Series Interflow	1/4"	3/8"	2.3	350 (24.1)	250 (17.2)	2 (0.9)
	3/8"	3/8"	2.3	350 (24.1)	250 (17.2)	2 (0.9)
	1/2"	3/8"	2.3	350 (24.1)	250 (17.2)	2 (0.9)

Shear-Seal® Directional Control Valve

Series 9000, 9020

Technical Drawings

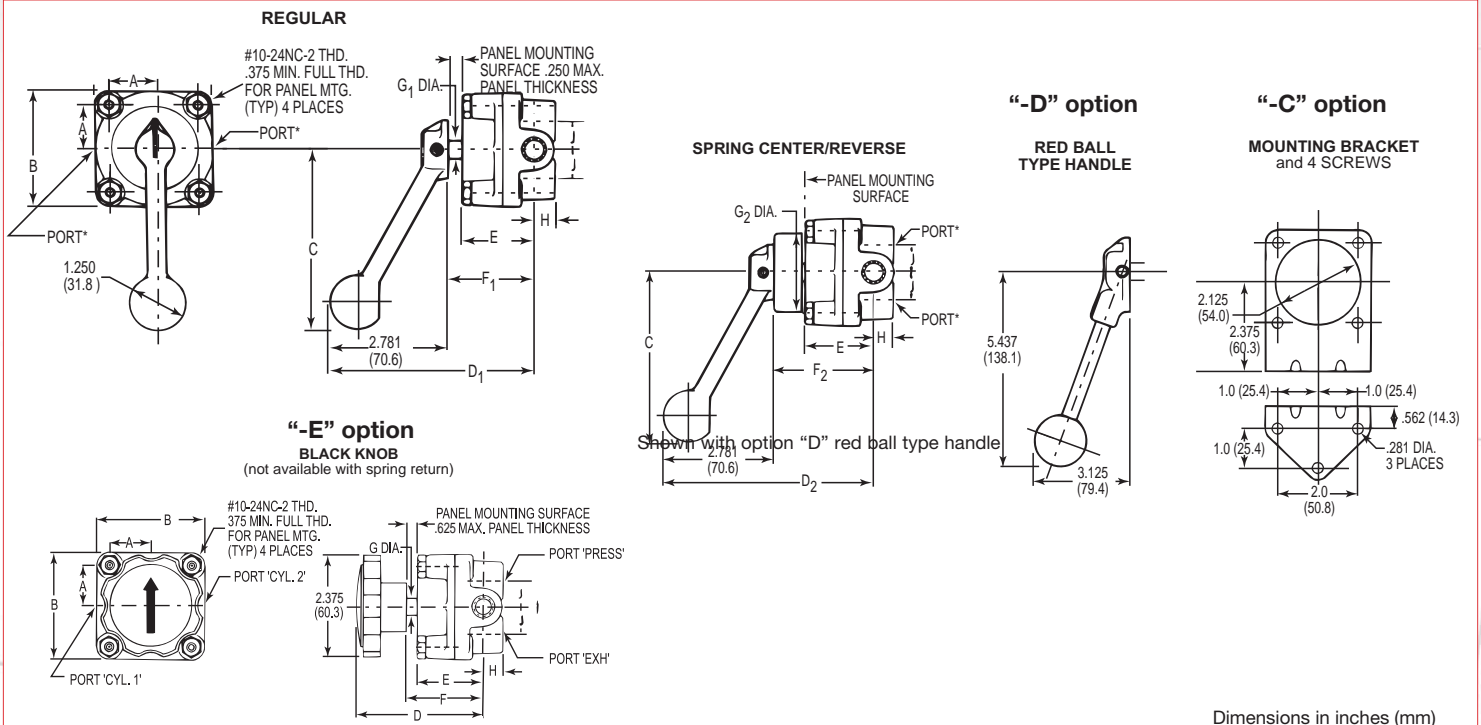

PORT SIZE NPT	A	B	C	Black Knob	Regular	Spring Center/Rever	E	Black Knob	Regular	Spring Center/Rever	Black Knob	Regular	Spring Center/Rever	H	J
	A	B	C	D	D-1	D-2	E	F	F-1	F-2	G	G-1	G-2	H	J
1/4 & 3/8	1.000 (25.4)	2.625 (66.7)	4.125 (104.8)	3.656 (92.9)	4.781 (121.4)	5.188 (133.8)	1.688 (42.9)	2.062 (52.4)	2.000 (50.8)	2.406 (61.1)	0.437 (11.1)	0.437 (11.1)	1.906 (48.4)	0.531 (13.5)	0.656 (16.7)
1/2	1.000 (25.4)	3.125 (79.4)	4.125 (104.8)	3.718 (94.4)	4.843 (123.0)	5.250 (133.4)	1.750 (44.5)	2.125 (54.0)	2.062 (52.4)	2.468 (62.7)	0.437 (11.1)	0.437 (11.1)	1.906 (48.4)	0.625 (15.9)	0.937 (23.8)

Product Configurator

Example: 902 2 -M

Series

900 Non interflow

Port Size

1 1/4" pressure port

3 1/2" pressure port (interflow only)

Operation

-M Manual operation

-MR Manual (spring return to reverse)

Optional O-ring Material

-Zxx See supplemental guide

Options

-B 2-position 90° rotation (no center position)

cket w/ 4 screws

-D Red ball type handle

cket & red ball type handle

-E Black knob (not available for spring return)

Flow Pattern

Blank if closed center selector

manipulator

-G Open center manipulator